

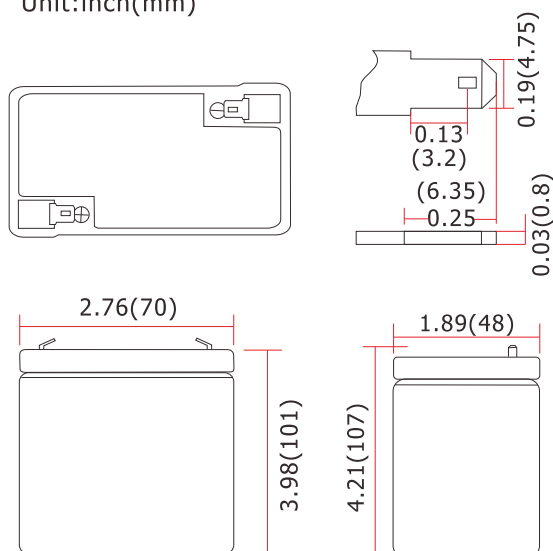


Unit:inch(mm)

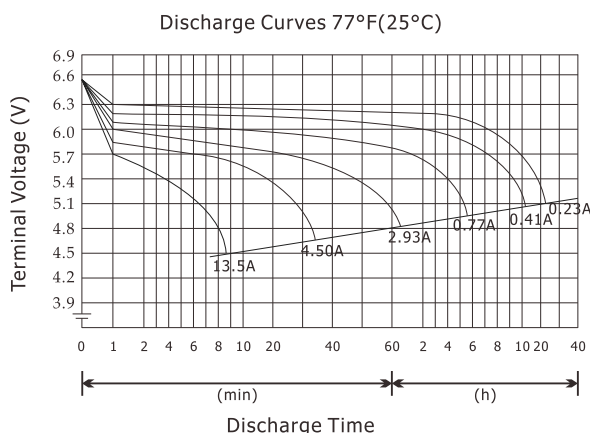

Discharge Current and Discharge Duration Time

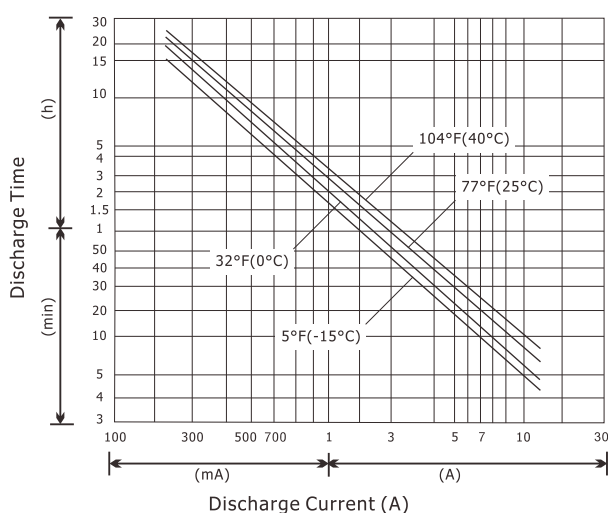

Specification

Nominal Voltage		6V	
Rated Capacity (20hr Rate)		4.5Ah	
Dimensions	Length	2.76inches (70mm)	
	Width	1.89inches (48mm)	
	Height	3.98inches (101mm)	
	Total Height	4.21inches (107mm)	
Weight	Approx. 1.61lbs (0.73kg)		
■ Characteristics			
Capacity 77°F(25°C)	20hour rate (0.23A)	4.50Ah	
	10hour rate (0.41A)	4.10Ah	
	5hour rate (0.77A)	3.85Ah	
	1hour rate (2.93A)	2.93Ah	
Internal Resistance	Full Charged, 77°F(25°C)	30mΩ	
Capacity Affected By Temperature (10hr Rate)	104°F(40°C)	102%	
	77°F(25°C)	100%	
	32°F(0°C)	85%	
	5°F(-15°C)	65%	
Self-Discharge 77°F(25°C)	Capacity after 3 month storage	90%	
	Capacity after 6 month storage	80%	
	Capacity after 9 month storage	60%	
Charge (Constant Voltage)	Initial Charge Current “LESS” than 1.35A		
	Cycle	7.20–7.50V/77°F(25°C)	
	Stand By	6.75–6.90V/77°F(25°C)	

**These data are average values obtained from three Charge/Discharge cycles. Note: These are NOT minimum values.


Constant Current Discharge Characteristics Unit: A (25°C / 77°F)

F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	5HR	8HR	10HR	20HR
4.8V	16.7	11.5	8.60	5.30	3.20	1.78	1.30	0.83	0.55	0.45	0.24
5V	15.5	10.8	8.20	5.10	3.10	1.74	1.28	0.82	0.54	0.44	0.24
5.1V	14.9	10.5	8.00	5.00	3.00	1.72	1.26	0.81	0.54	0.44	0.23
5.2V	13.6	9.90	7.70	4.80	3.00	1.69	1.24	0.80	0.53	0.43	0.23
5.4V	12.3	9.20	7.20	4.60	2.90	1.65	1.22	0.78	0.51	0.42	0.22
5.6V	10.8	8.20	6.60	4.50	2.80	1.62	1.17	0.77	0.50	0.42	0.21


Constant Power Discharge Characteristics Unit: W (25°C / 77°F)

F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	5HR	8HR	10HR	20HR
4.8V	90.0	63.5	50.0	30.6	17.8	10.1	7.40	4.80	3.15	2.55	1.35
5V	83.0	59.5	47.0	29.7	17.5	10.0	7.20	4.75	3.10	2.50	1.35
5.1V	79.0	58.0	45.6	29.2	17.3	9.85	7.10	4.65	3.05	2.50	1.30
5.2V	72.5	54.0	43.2	28.3	16.9	9.65	7.00	4.55	3.00	2.45	1.30
5.4V	65.5	50.0	40.5	27.2	16.5	9.45	6.80	4.45	2.95	2.40	1.25
5.6V	58.5	45.3	37.9	25.9	16.0	9.20	6.60	4.30	2.85	2.30	1.25


Trickle / Float Service Life

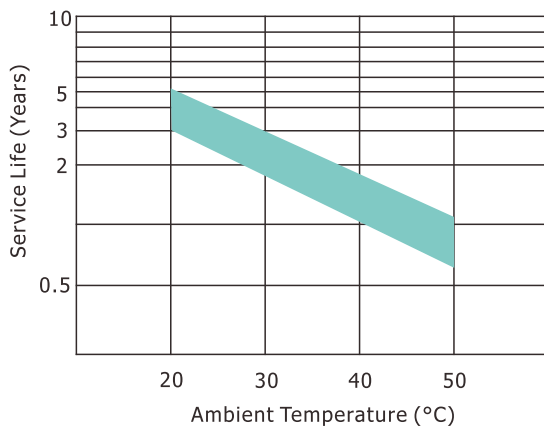

Effect of Temperature on Capacity

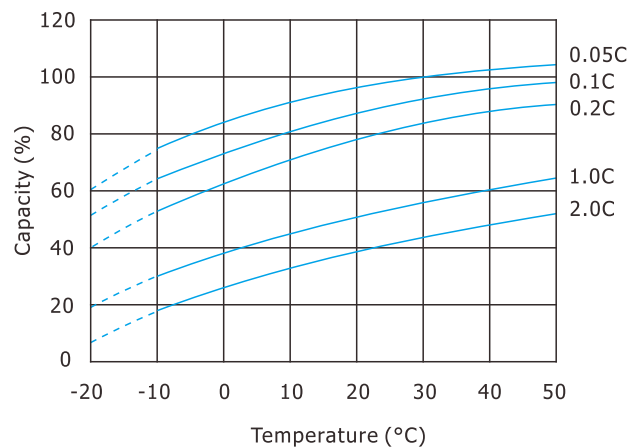

Cycle Service Life (@25°C/77°F)

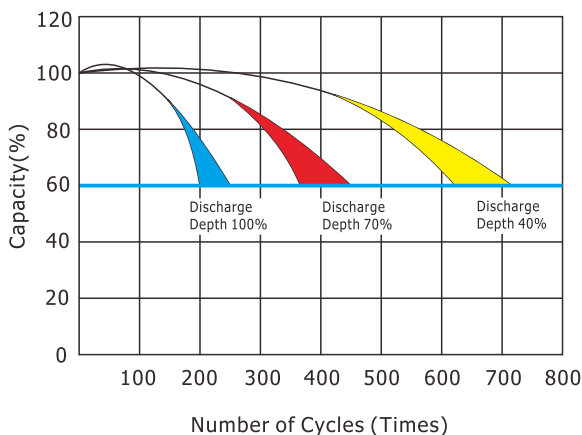

Capacity Retention Characteristic

